

Koker Profiel 40x10x1.5  
S235JRH

Koker Profiel 50x20x2  
S235JRH

t.p.v. voetplaat 2x strip 40x10  
S235JRG2

Strip 40x10  
S235JRG2

Koker Profiel 40x10x1.5  
S235JRH

Koker Profiel 50x20x2  
S235JRH

Technical drawing of a corner joint. The drawing shows a cross-section of a corner where two walls meet. A circular hole is centered in the corner. Dimensions are indicated with red arrows: 163 (diagonal distance from the outer corner to the center of the hole), 123 (horizontal distance from the inner vertical wall to the center of the hole), and 64 (vertical distance from the inner horizontal wall to the center of the hole). Dashed green lines indicate the center lines of the walls and the hole.

Technical drawing of a vertical assembly. The total height is 1225. The main vertical section has a height of 1000. A small section at the bottom has a height of 90. The width of the main section is 7. The width of the bottom section is 125. The bottom section is divided into two parts: 110 and 15. A green line points to the 15 part.


[illegible]

**Montageset bestaand uit :**  
Ankerstang-M12x140  
Carrosseriering (ISO 7093)-M12  
Hoge dopmoer (DIN 1587)-M12  
HiltiHit Kit

HEKWERK :  
kader : koker 50x20x2 mm  
hekvulling : koker 40x10x1,5 mm h.o.h. 110 mm.  
staal : S235JRG2

STALEN BEHANDELING  
2 laags poedercoating in RAL 7003 (Mosgrijs)  
Axalta fine texture

**VOOR UITVOERING**  
door T.V. d.d. 05-11-2019

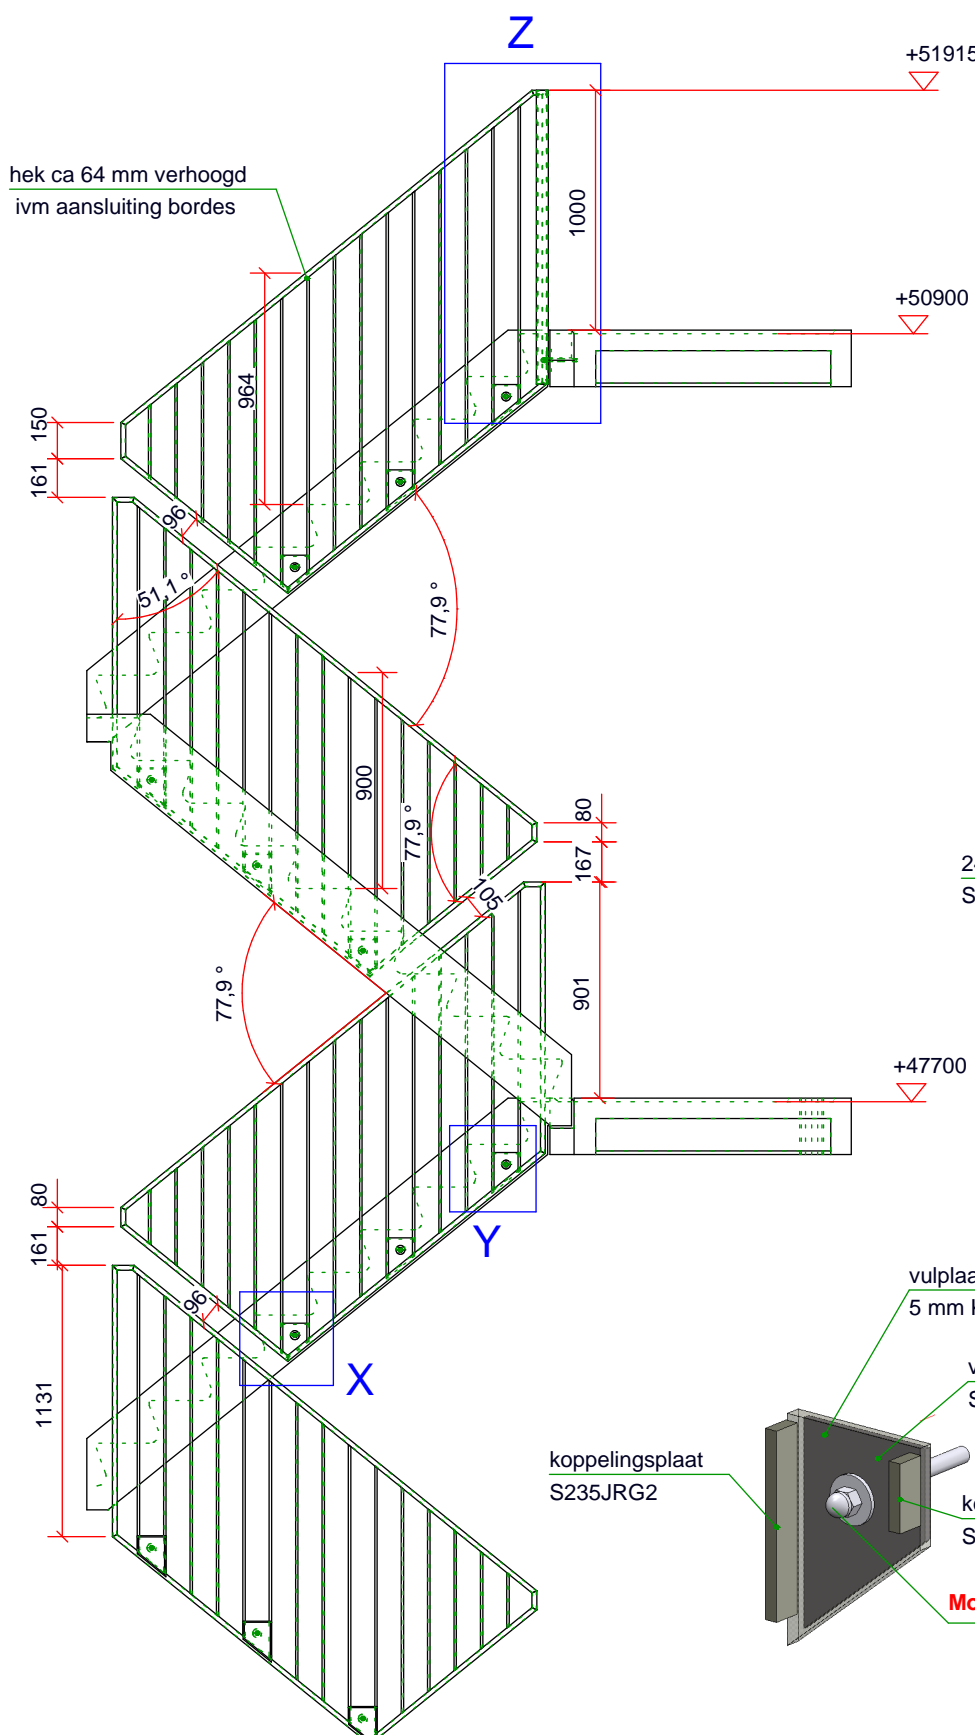

<input type="checkbox"/> <b>VOORLOPIG</b>		handtekening opdrachtgever voor akkoord.		<b>CE</b>	
<input checked="" type="checkbox"/> <b>DEFINITIEF VOOR OPDRACHTGEVER</b>					
Productent: Jonkers Bouwmetaal		E			
Productentorder nr.:		D			
Uitvoerder: Tel:		C			
Opdrachtgever : Stam en de Koning Bouw B.V.		B	09-10-2019	Definitief	DvB
Project : Bouwveld S1, Strijp-S te Eindhoven		A	26-09-2019	opm. verwerkt	DvB
Onderdeel : Principe opzet traphekwerk		Rev:	Datum:	Omschrijving:	Door:
Datum : 12.09.2019		<div style="display: flex; justify-content: space-between; align-items: center;"> <div>  <div> <b>JONKERS</b>  BOUWMETAL </div> </div> <div> <div>draw2design.nl</div> <div> <small>technisch ingenieursbureau</small>  Mail : <a href="mailto:info@draw2design.nl">info@draw2design.nl</a> </div> </div> <div>  </div> </div> <div style="text-align: right;"> tekening-formaat :  <span style="font-size: 2em;">A2</span> </div>			
Getekend : DvB					
Tek.schaal : 1:50					
 Am. Projectie		<div style="display: flex; justify-content: space-between;"> <div> Postbus 82  8320 AB, Urk    tel : +31(0)527-685156  Mail : <a href="mailto:info@jonkers-bouwmetaal.nl">info@jonkers-bouwmetaal.nl</a> </div> <div> <b>Tekeningnummer</b>  <div style="display: flex; justify-content: space-between;"> <div> Proj.nr Klant: 116941  Mail : info@jonkers-bouwmetaal.nl </div> <div> Proj.nr. D2D: B19-1620    </div> <div> Deelproj.nr.: 3    </div> <div> Blad.nr.: 0 0 1 - B -    </div> <div> Rev: B -    </div> <div> Fase:    </div> </div> </div> </div>			